



SA034000 - Kit, 60352A, Replacement LT076600

Kit Components:


1. NB073400 Bolt, Hex, 1/2-13 X 4.5, GD 8 (Qty. 1)
2. 87101A Washer, Lock, 1/2" (Qty. 1)
3. LT076600 Instructions, Kit (Qty. 1)

Tools Needed:


1. 3/4" Socket Wrench
2. 9/16" Socket Wrench
3. 1/2" Socket Wrench
4. 3/4" Open End Wrench
5. 3/16" Allen Wrench
6. Vice or Slip Joint Pliers

Instructions:

1. Disconnect from power source.

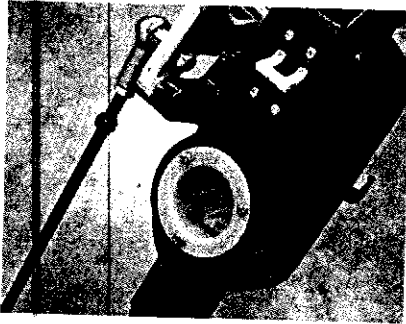


2. Disconnect the control rod from the control lever.


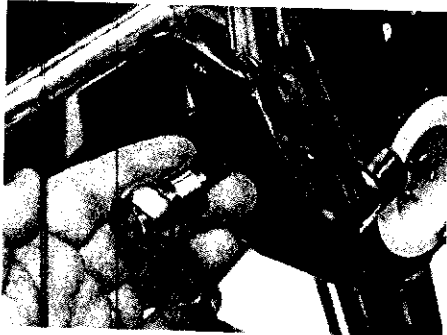


For more information, contact American Sanders Technical Services at
1-800-334-2246 or +1-336-372-8080
© 2017 Amano Pioneer Eclipse Corporation; www.americansanders.com



3. Place transport dolly under machine with the front of the machine on the floor as shown.

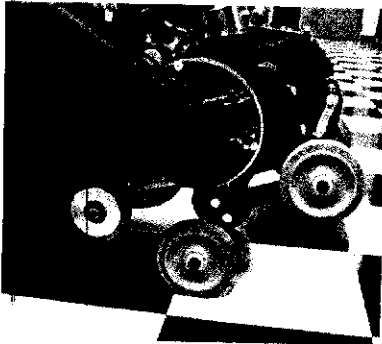



4. Remove handle assembly from machine.

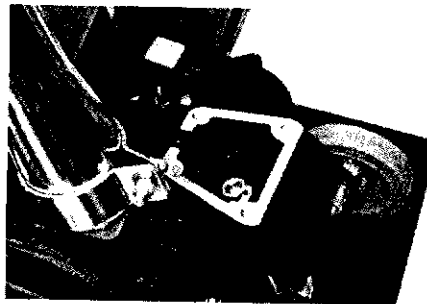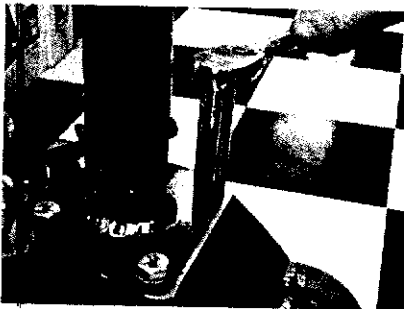



5. Use open end wrench to hold nut on the bottom and remove top nut. Set the top nut aside to be used later. Remove caster assembly.

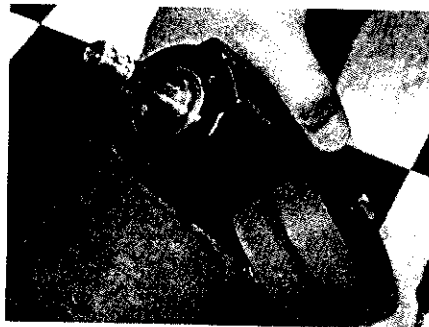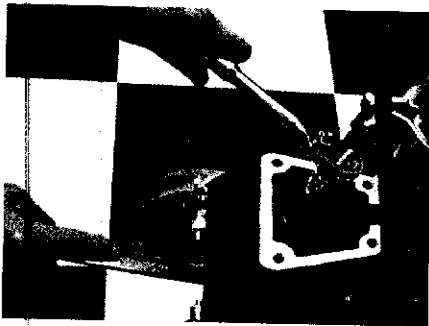


6. Remove wheels as shown.

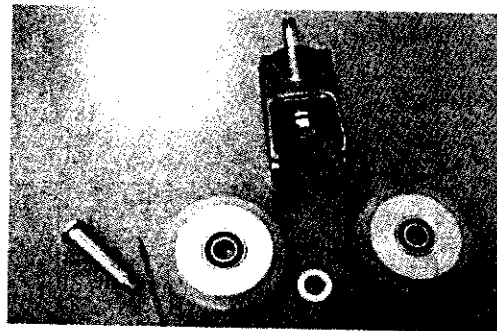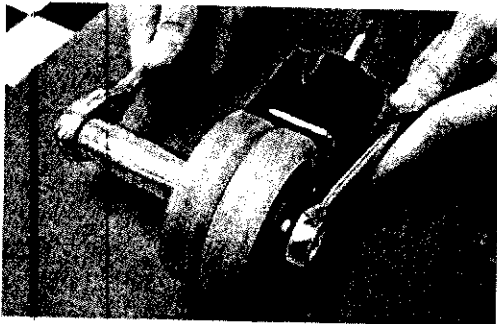


7. Place shaft in a vice and remove nut from the shaft as shown. If a vice is not available, secure the shaft with slip joint pliers.

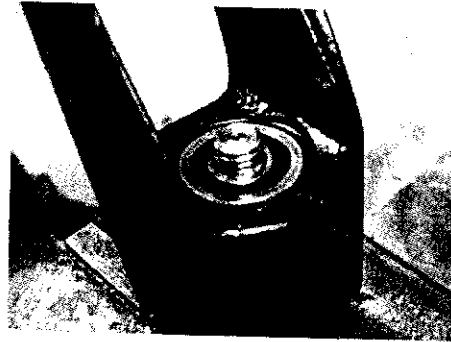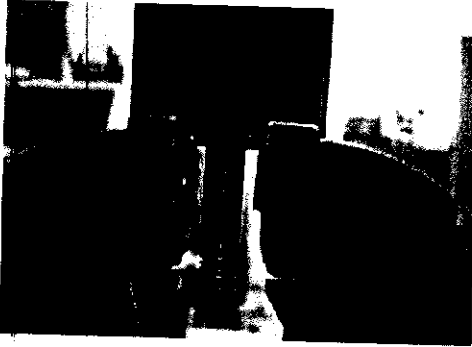


8. Remove the shaft from the caster assembly.

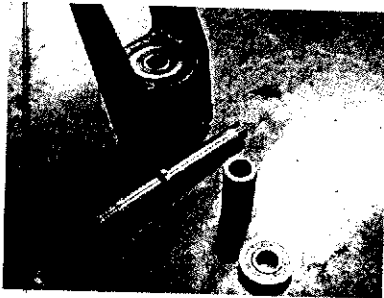



9. Place supplied bolt through bottom bearing as shown. Place spacer on the bolt as shown.

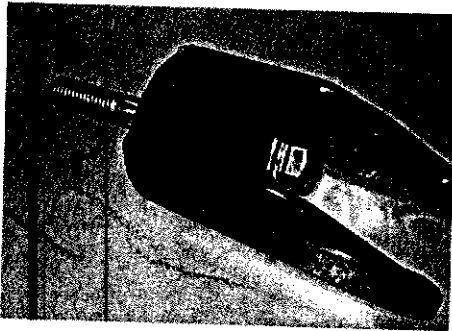


10. Replace top bearing.

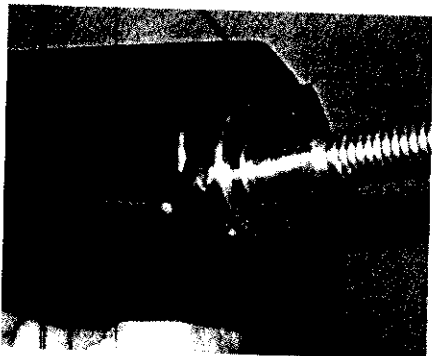



11. Replace wheels. Ensure that the spacer washer is placed between the wheels.

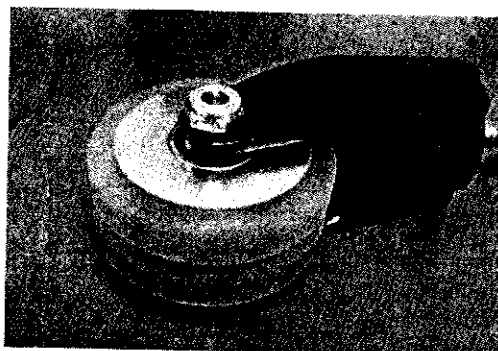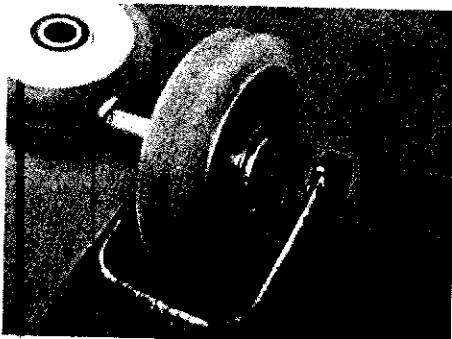


12. Place the supplied lock washer on the bolt as shown.

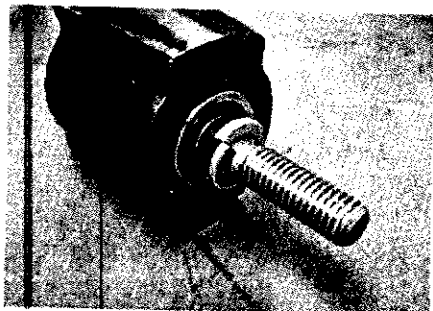


13. Place caster assembly back on the machine as shown and secure caster assembly with top nut.

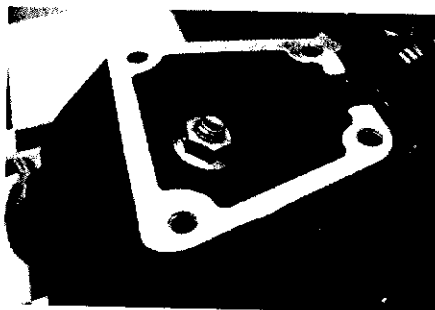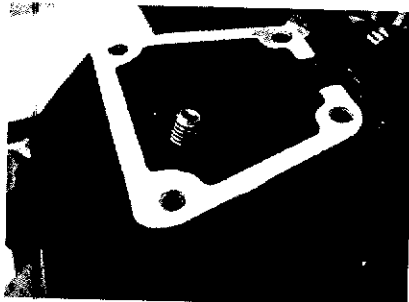

14. Replace handle assembly.

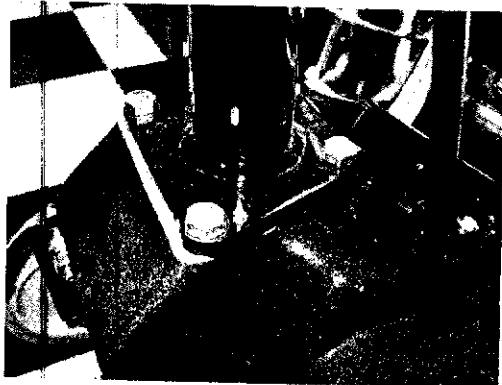

15. Swing the transport dolly up and place machine back on the floor.

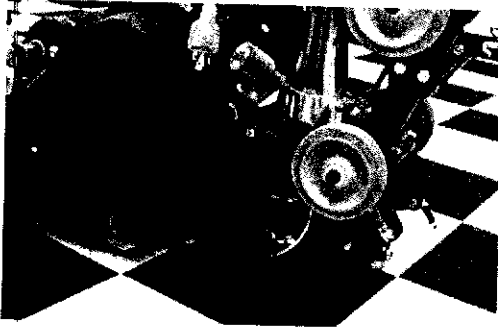

16. Re-attach control rod.

