


EXTERNAL CONNECTIONS

MOTOR

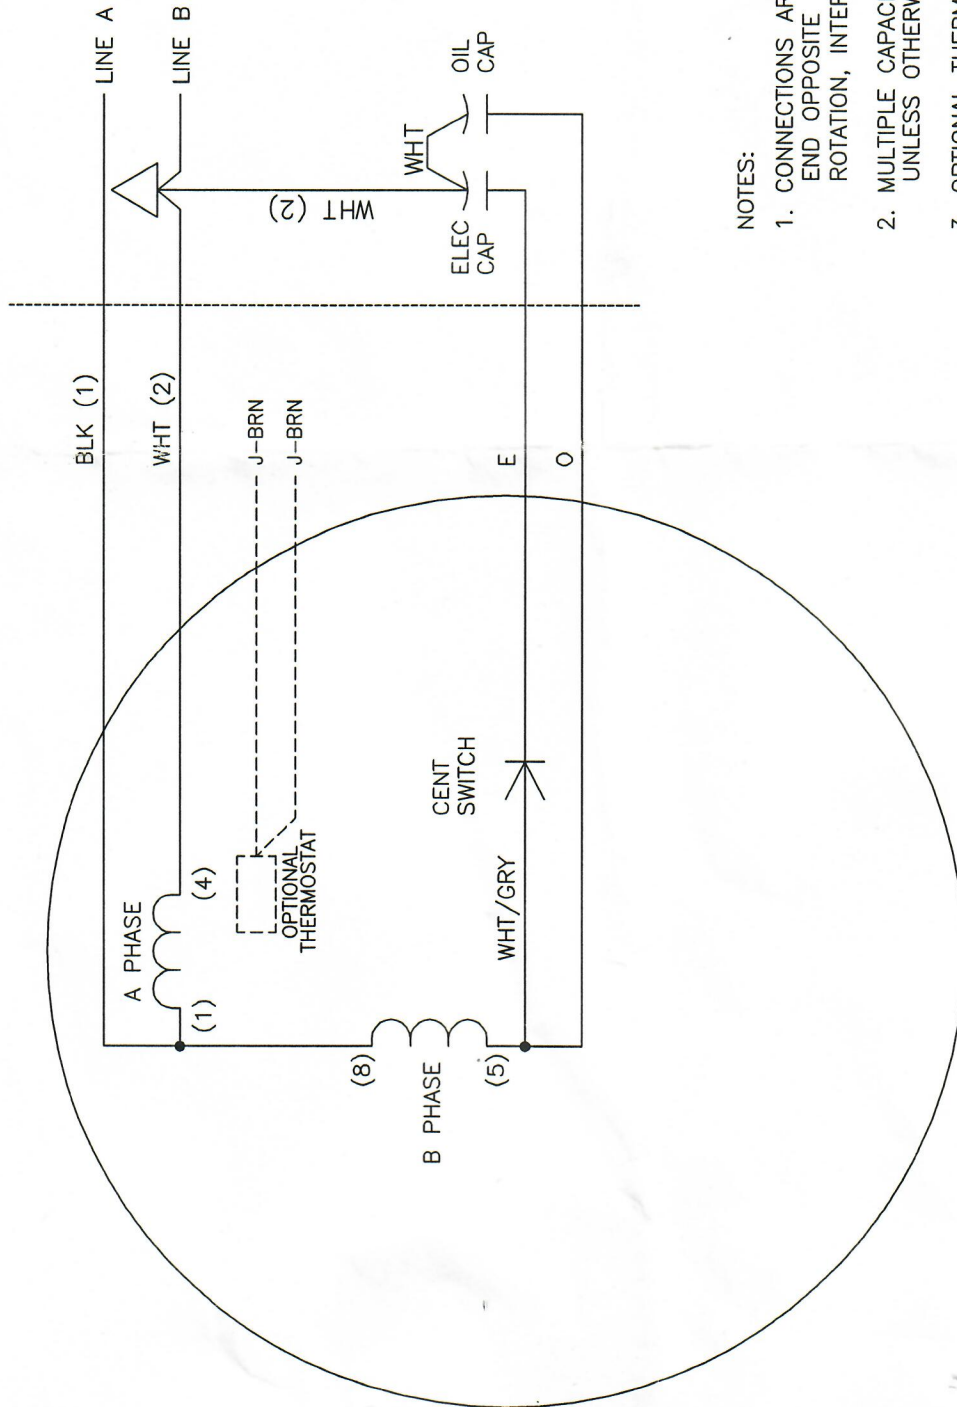

NOTES:

1. CONNECTIONS ARE SHOWN FOR CCW ROTATION FACING END OPPOSITE SHAFT EXTENSION (STD). FOR CW ROTATION, INTERCHANGE 5 AND 8 INTERNALLY.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
4. LEAD COLORS ARE REQUIRED. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

**BALDOR - RELIANCE®**

REV. DESC: NEW

REV. LTR: -      VERSION: 00

FILE: \AAA\00262\820

REVISED: 02:16:50 03/02/2022

BY: USSEFIN

TDR: 000001186526



TYPE LC, SV, FIX, 4 LDS, SEP MOUNTED CAPS, SPL LEAD COLORS

MTL: -