



INSTALLATION INSTRUCTIONS

Watch the installation video at <https://youtu.be/uhDdtRh7bQk>

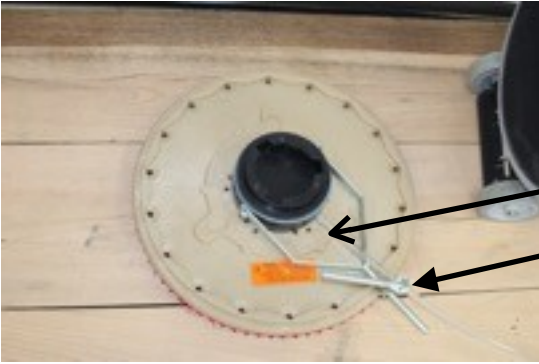


3/8" Tube

Loosen adjustment screws.

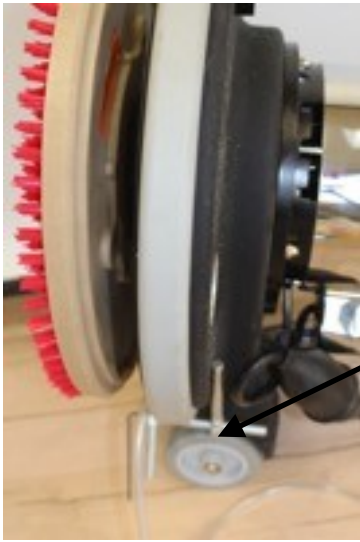


Install coater on buffer. Adjust the anchors so the vertical anchor contacts the left side of the buffer. The top anchor holds the main anchor just below the bottom lip of the buffer. It should allow the main anchor rod to float between the buffer frame and the rotating pad driver.

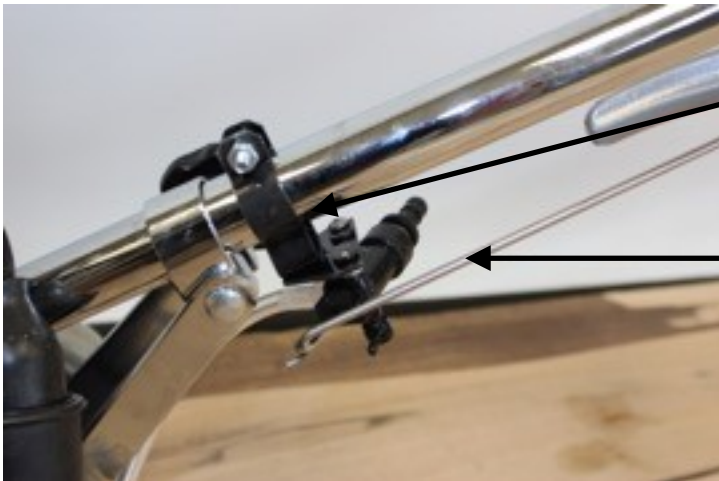

Drop the buffer handle to the lowest position that you would ever operate it. Mount the valve just above the buffer handle latch. The valve should be on the bottom side of the handle.

Stick the pull handle rod through the valve lever. It may have to be straightened as it is bent to fit in shipping box.

Connect the clear plastic 3/8" (OD is 3/8 and ID is 1/4") hose to barbed fitting.

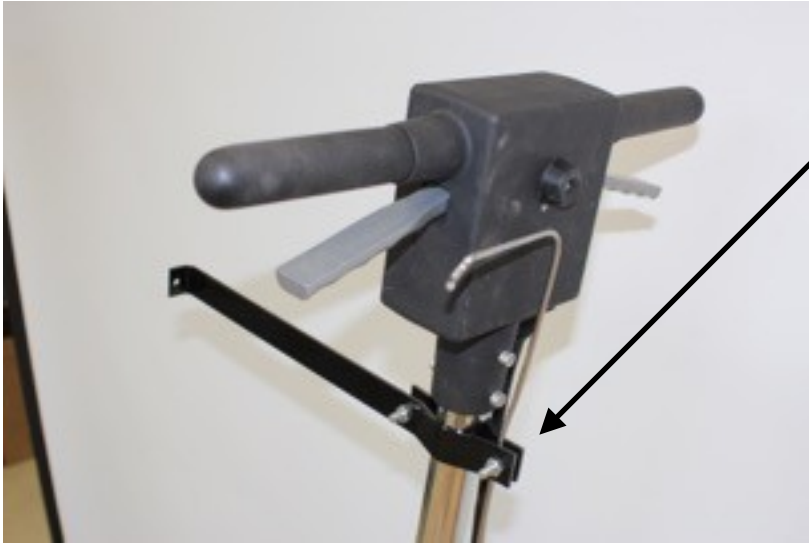

Attach the bag holder to the top of the handle and pass the control rod behind the bottom bolt. Bend the control rod for easy operation of valve.



Hang the bag on the bracket and hook up the hose to the valve. (Has push on locking fittings). The Hose valve should be on the control valve. Fill the Bag with stain and operate.

Cleaning

The clear plastic hose can be removed from the lower spin coater. Place the hose in a suitable container to catch the cleaning fluid. Put an appropriate solvent in fluid bag and rinse the bag, hoses and valve. The valve can be easily removed for further cleaning.



Remove plastic down feed hose.
Remove Lock ring by turning COUNTER CLOCKWISE.



Remove plastic spacer and twist off the center section.
Clean parts using an appropriate solvent or mineral spirits or even automotive spray brake clean.

DANGER !

Rags, steel wool, other waste soaked with chemicals used in this product, and sanding residue may spontaneously catch fire if improperly discarded. Immediately place rags, steel wool, other waste soaked with this chemicals, and sanding residue in a sealed, water-filled, metal container. Dispose of in accordance with local fire regulations.

Dispose of used stain pads and bags in accordance with all local, regional, national and international regulations. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves. Wear eye or face protection.

Wear protective clothing. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Use explosion-proof electrical, ventilating, lighting and all material-handling equipment. Use only non-sparking tools. Keep container tightly closed. Use only outdoors or in a well-ventilated area. Do not breathe vapors.

WARNING !

DO NOT allow children to play with this equipment.

Do NOT remove or install the attachment with the buffer connected to power.

Do Not leave chemicals in bag. Store chemicals according to their manufacturers recommendation.

Use safety and respiratory devices according to the chemical manufacturers recommendations. Do Not leave unattended.

Do Not use if damaged or leaking.

Injury to operator or bystanders could occur if an abrupt change in floor surface texture is encountered when using this machine. Abrupt change in floor surface texture can cause a sudden pulling motion by this machine. This sudden pulling motion can result in loss of control of the machine which could injure the operator or bystanders. Avoid motions that could cause machine to cross from a smooth floor surface to a carpeted or rough texture floor surface. Avoid motions that could allow the machine to come in contact with low obstacles, such as floor electrical outlets, door stops or entry molding, etc.

This product is intended for commercial use. Do not sit or stand on buffer using this attachment. Do NOT use chemicals containing bleach or chlorine.