


Clarke & Portercable F89 Baldor

F-89

MOTOR

EXTERNAL CONNECTIONS

CD1133

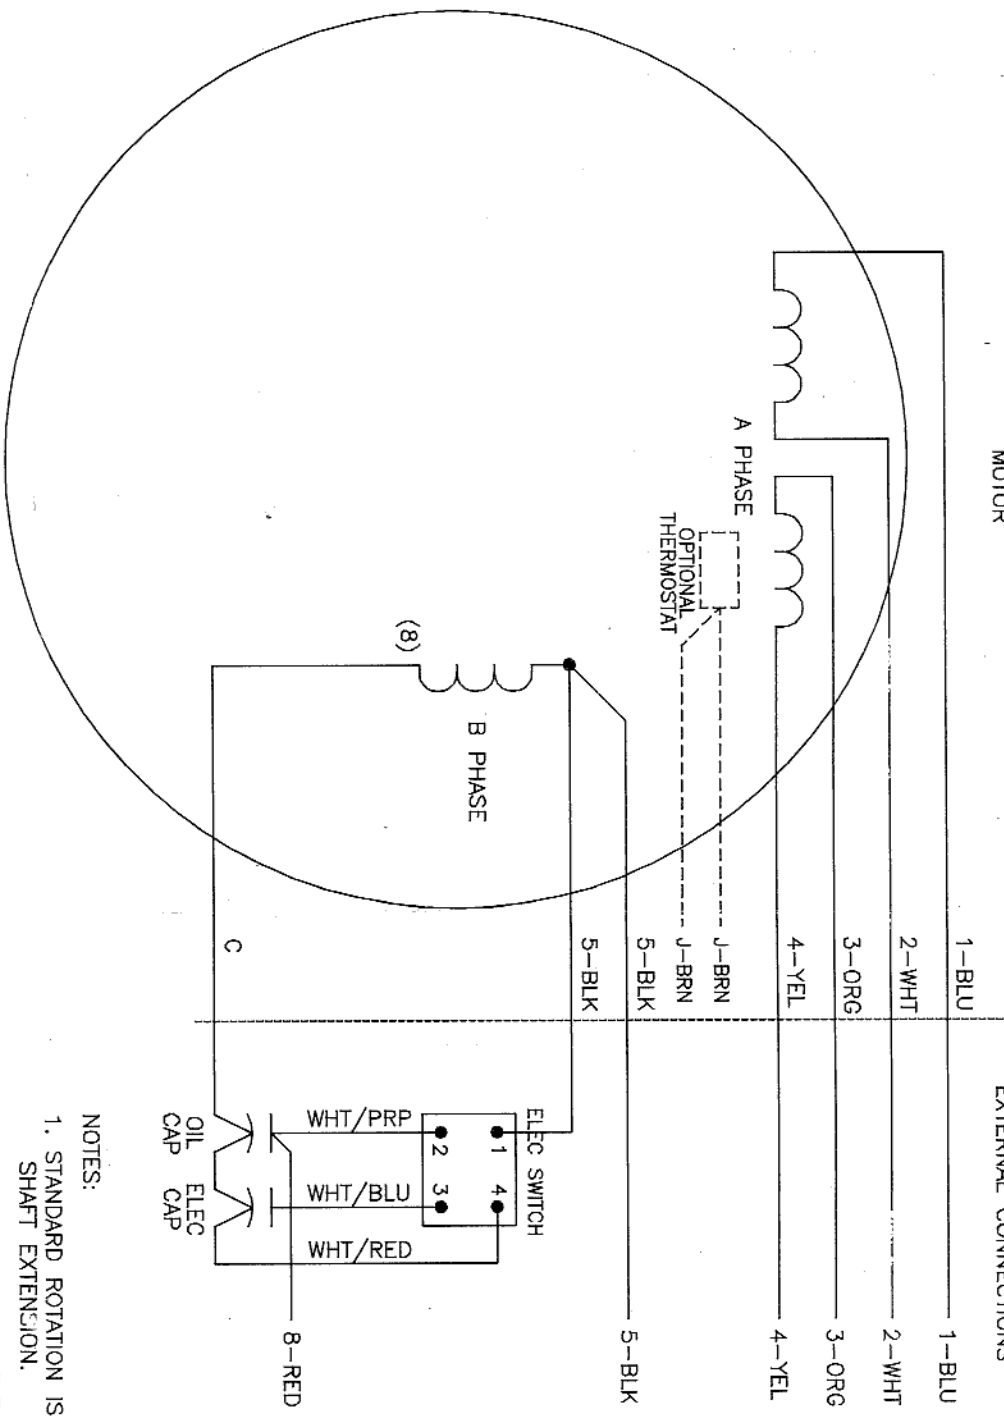

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	-
LOW OPP	1,3,5	2,4,8	-

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
 3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 4. USE STEARNS ELECTRONIC START SWITCH OR EQUIVALENT.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADD OPTIONAL LEAD COLORS	
REV. LTR: A	BY: JLP
REVISED: 11:17:21 08/27/2001	TDR: 248206
FILE: AAAA00035444	REF: CD1133
MTL: -	

BALDOR ELECTRIC CO.

TYPE LC, DV, REV, 7 LEAD, SEP CAPS AND ELECTRONIC SWITCH

CD1133